



Blueprint

v.0.7.1

Blueprint CSS version 0.7.1 (<http://www.blueprintcss.org>)

Copyright © 2007-2008 Olav Bjorkoy (<http://bjorkoy.com>)

Cheat sheet v.1.3 by Gareth J M Saunders, based on Help Sheet v.0.3 by Alejandro Vasquez

SPAN CLASSES

Use these classes to set the width of a column

| | |
|---------|---------|
| span-1 | span-13 |
| span-2 | span-14 |
| span-3 | span-15 |
| span-4 | span-16 |
| span-5 | span-17 |
| span-6 | span-18 |
| span-7 | span-19 |
| span-8 | span-20 |
| span-9 | span-21 |
| span-10 | span-22 |
| span-11 | span-23 |
| span-12 | span-24 |

APPEND CLASSES

Add these to a column to add empty columns to the right.

| | |
|-----------|-----------|
| append-1 | append-13 |
| append-2 | append-14 |
| append-3 | append-15 |
| append-4 | append-16 |
| append-5 | append-17 |
| append-6 | append-18 |
| append-7 | append-19 |
| append-8 | append-20 |
| append-9 | append-21 |
| append-10 | append-22 |
| append-11 | append-23 |
| append-12 | |

PREPEND CLASSES

Add these to a column to add empty columns to the left.

| | |
|------------|------------|
| prepend-1 | prepend-13 |
| prepend-2 | prepend-14 |
| prepend-3 | prepend-15 |
| prepend-4 | prepend-16 |
| prepend-5 | prepend-17 |
| prepend-6 | prepend-18 |
| prepend-7 | prepend-19 |
| prepend-8 | prepend-20 |
| prepend-9 | prepend-21 |
| prepend-10 | prepend-22 |
| prepend-11 | prepend-23 |
| prepend-12 | |

PUSH/PULL CLASSES

Use these classes on an element to **push** it right into the next column, or **pull** it left into the previous column.

| | |
|-----------|-----------|
| push-1 | pull-1 |
| push-2 | pull-2 |
| push-3 | pull-3 |
| push-4 | pull-4 |
| up to ... | up to ... |
| push-24 | pull-24 |

STYLESHEET LINK

Download this version from <http://github.com/joshuaclayton/blueprint-css/tree/v0.7.1> and add these lines into the <head> of your page. Check that your href path is correct.

```
<link rel="stylesheet" href="blueprint/screen.css" type="text/css"
  media="screen, projection" />
<link rel="stylesheet" href="blueprint/print.css" type="text/css"
  media="print" />
<!--[if IE]>
<link rel="stylesheet" href="blueprint/ie.css" type="text/css"
  media="screen, projection" />
<![endif]-->
```

USAGE

```
<body>
  <div class="container">
    <div class="span-16">
      <p>Column 1</p>
    </div>
    <div class="span-8 last">
      <p>Column 2</p>
    </div>
  </div>
</body>
```

div.span-x now implies a column. Remember to use "last" for the last column of the row to avoid it jumping to the next row. Columns can be nested inside one another.

TYPOGRAPHY


typographic.css sets up some sensible default typography. The font-size percentage is of 16px (0.75 * 16px = 12 px). Line-heights and vertical margins are automatically calculated from this in ems.

The base line-height is 18px (1.5ems). This means that every element, from line-heights to images have a height that is a multiple of 18 (or 1.5 if you use ems).

Color is #222 (dark grey); font-family is "Helvetica Neue", "Helvetica", "Arial", sans-serif; Also defines tables, lists and misc. classes.

GRID defined in grid.css.

If you need more or fewer columns use this formula to find the new total width:
total width = (columns * 40) - 10

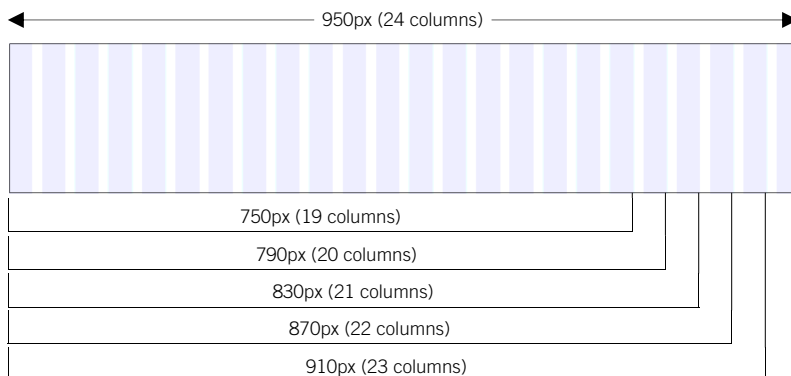

GRID CLASSES

| | |
|------------|--|
| .append-x | Add these to a column to append empty columns; x = 1-23. |
| .border | Shows a border on the right hand side of a column; use on <div>. |
| .box | Creates a padded box inside a column. (padding: 1.5em; margin-bottom: 1.5em;). |
| .clear | Regular clearing, apply to column that should drop below previous ones. |
| .clearfix | Clearing floats without extra markup. |
| .colborder | Shows a border with more whitespace, spans one column; use on <div>. |
| .container | A container should group all your columns; use on <div>. |
| div.last | The last column in a row needs this class; use on <div>. |
| .prepend-x | Add these to a column to prepend empty columns; x = 1-23. |
| .pull-x | Use these classes on an element to pull it into the next column; x = 1-24. |
| .push-x | Use these classes on an element to push it into the next column; x = 1-24. |
| .showgrid | Use this on any div.span / container to see the grid. |
| hr.space | Use this to create a horizontal ruler across a column; can also simply use <hr />. |
| div.span-x | Use these classes to set the width of a column; x = 1-24; use on <div>. |

html

reset.css

grid.css

typography.css

forms.css

ie.css

RESET defined in reset.css.

Blueprint CSS resets all browsers' default tags to :
- margin, padding, border: 0
- font-size: 100%
- font-weight: normal
- other font values: inherit
- image borders: 0

Tables still need "cellspacing="0" in the markup though.

TYPOGRAPHY CLASSES

These classes are defined in the typography.css file. Other typographic tags as also redefined in this file.

| | |
|------------|-------------------|
| .small | 0.8em; line 1.875 |
| .large | 1.2em; line 2.5 |
| .hide | display: none |
| .quiet | color 666 (grey) |
| .loud | color 000 (black) |
| .highlight | bg ff0 (yellow) |
| .added | bg 060 (green) |
| .removed | bg 900 (red) |
| .first | mL 0; pL 0 |
| .last | mR 0; pR 0 |
| .top | mT 0; pT 0 |
| .bottom | mB 0; pB 0 |

FORMS

These are defined in the forms.css file.

| | |
|-------------|-------------------|
| .error | red framed box |
| .notice | yellow framed box |
| .success | green framed box |
| input.text | w 300px pad 5px |
| input.title | font-size 1.5em |
| textarea | w 390px h 250px |
| select | w 200px |
| label | bold |
| fieldset | padding 1.4em |
| legend | font-size 1.2em |

IE FIXES

ie.css contains every hack for Internet Explorer.

| | |
|----------|------------------------|
| IE all | Fix margin bugs |
| | Line height on sub/sup |
| IE 5 | Centre layout |
| IE 6 | Fix legend bug |
| IE 6 & 7 | Fix numbers |
| | Fix <hr/> margins |
| IE 7 | Fix <code> wrap |